


Data Sheet

Type Number:	55615	
System:	Nickel Metal Hydride/ KOH Electrolyte	
Nominal Voltage [V]:	1.2	
Nominal Capacity C [mAh]:	140	
Typical Capacity C [mAh]:	150	
	at 28 mA / 1.00 V	
Weight, approx. [g]	6	
Dimensions [mm]:	min.	max.
Length [l]:	13.9	14.1
Width Facing [w]:	25.4	25.6
Height [h]:	5.6	5.85

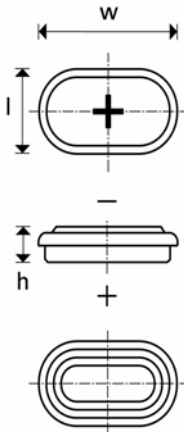

UL Recognition:	MH 13654 (N)	
Coding:	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	
Temperature Ranges [°C]	min.	max.
Storage: less than 30 days	-40	65
Discharge:	-20	65
Charge:	0	65
Charging Method:		
Normal Charging:	14 mA for 14 – 16 h	
Accelerated Charging (20°C):	28 mA for 7-8 h	
Fast Charging:	70 mA for 3 h *	
	Time controlled, voltage control recommended	
Trickle Charging:	4.2 mA	
Overcharge (20°C):	14 mA continuous 28 mA up to 1 year	
Charge Retention [%] at 20°C:	90	
	Capacity available after 1 month Storage at 20°C	
Internal Resistance [Ohm]:	0.8	
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)	
Impedance [Ohm]:	0.13	
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)	
Typical Capacities [mAh]:		
	at 140 mA / 0.90 V	
	88	
Max. Discharge Current (cont.) [mA]:	280	
Life Expectancy (typical):		
IEC Cycle:	1000 Cycles	
Trickle Charge:	up to 6 years (20°C)	
Trickle Charge:	up to 3 years (45°C)	

* for fully discharged cells, 20 °C
Capacities based on normal charging

Subject to change without prior notice !
Date of Issue: 04-05-19



ห้างหุ้นส่วนจำกัด สยามแบตเตอรี่อิเล็กทรอนิกส์
185 ถนนวงศ์สว่าง แขวงบางซื่อ เขตบางซื่อ กรุงเทพฯ 10800
Siam Battery Electronic Limited Partnership
185 Wongsawang Road, Bangsue, Bangkok 10800 THAILAND
Tel. 02-913-0750, 02-587-7780 Fax. 02-587-1624
E-mail: sale@SiamBat.com www.SiamBat.com